


# AC10 SS 23/1 nxP

## Audio Cable

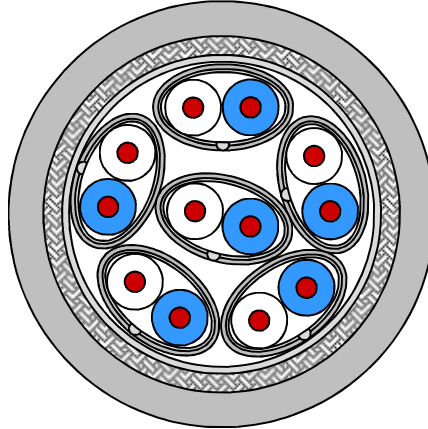

## Application

Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals.

## Standards

Basing upon ARD-Specification and acc. to AES/EBU-Recommendation.

## Flame resistance

VDE 0472 part 804 class B or C and IEC 332-1 or 332-3 cat. CF

## Construction

Conductor	solid copper wire, bare 0.56 mm (cross section 0.26 mm <sup>2</sup> )	∅ AWG23/1
Insulation	Foam-skin-PE	∅ 1.4 mm
Pair stranding	Two cores twisted to the pair	
Pair identification	a - core: white, b - core: blue (the above colours in regular intervals)	
Pair screen	Al-PET-foil, Aluminium outside + solid copper drain wire, tinned	∅ 2.9 mm
Pair insulation of the one pair cable	PET-foil	
Overall screen of the one pair cable	copper braid, tinned	
Pair sheath of the multi-pair cables	halogen free, flame retardant copolymer	
Colour and identification	grey RAL 7001 with number printing	
Sheath	halogen free, flame retardant copolymer	
Sheath colour	grey, RAL 7001	
Sheath marking	<b>DRAKA</b> COMTEQ – AC10 SS 23/1 nP AES/EBU - 110 Ω	

## AC10 SS 23/1 nxP

### Mechanical properties

at 20°C

Bending radius during installation	with load	≥ 15 x cable diameter
	without load	≥ 10 x cable diameter
Temperature range	- 30 °C bis + 70 °C	

### Electrical properties

at 20°C

DC loop resistance	≤ 165 Ω/km	
Insulation resistance	≥ 2000 MΩxkm	
Mutual capacitance at 800 Hz	nom. 45 nF/km	
Capacitance unbalance (pair to ground)	≤ 1200 pF/km	
Velocity ratio	approx. 78 %	
Test voltage (50 Hz, 1 min) core/core and core/screen	700 V rms	
Characteristic impedance	6 MHz : 110 Ω ± 10%	
Transfer impedance	up to 10 MHz	≤ 10 mΩ/m
	up to 100 MHz	≤ 100 mΩ/m

### Electrical data

at 20°C

Frequency [MHz]	Near-end crosstalk (cable length: 300 m) Draka Multimedia Cable - Measurement values		Attenuation Draka Multimedia Cable - Measurement values
	neighbouring pairs [dB]	unneighbouring pairs [dB]	[dB/100m]
0.015	85	95	0.33
1.0	90	90	2.45
4.0	90	90	4.2
10.0	90	90	6.3
20.0	90	90	8.6

## AC10 SS 23/1 nxP

### Technical data

Product code	Type	Brand name	Outer diameter	Weight	Standard-delivery-length	Drum size	Gross weight	Copper content	Tensile force
			mm	Kg/km	M	EW	Kg		N
1002105 CT7649010	1x2x0.5 6 PiMF	AC10 SS 23/1 1P FRNC-C	4.6	27	1000	051	31	16.4	80
1002115 CT7649710	2x2x0.5 6 PiMF	AC10 SS 23/1 2P FRNC-C	8.3	90	1000	071	115	37	205
1002106 CT7649110	3x2x0.5 6 PiMF	AC10 SS 23/1 3P FRNC-C	8.8	108	1000	081	139	45	230
1002108 CT7649210	5x2x0.5 6 PiMF	AC10 SS 23/1 5P FRNC-C	10.9	170	1000	091	217	85	425
1002109 CT7649310	6x2x0.5 6 PiMF	AC10 SS 23/1 6P FRNC-C	11.8	190	1000	091	237	90	460
1002103 CT7648710	8x2x0.5 6 PiMF	AC10 SS 23/1 8P FRNC-C	13.0	210	1000	091	247	107	550
1002111 CT7649410	10x2x0.5 56 PiMF	AC10 SS 23/1 10P FRNC-C	15.1	275	1000	101	345	125	640
1002113 CT7649510	12x2x0.5 56 PiMF	AC10 SS 23/1 12P FRNC-C	15.6	320	1000	121	460	145	725

[PRODUCT CODE TABLE]

© PRYSMIAN GROUP 2008, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.