


## Equipotential busbar with plastic base plate

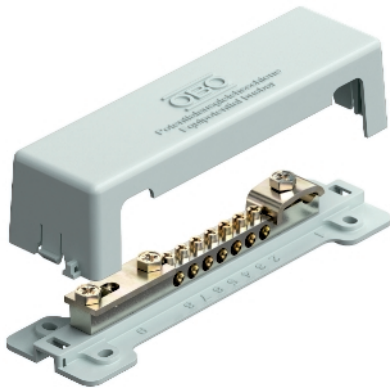

Equipotential busbar for equipotential bonding according to DIN VDE 0100-410/-540 and lightning protection equipotential bonding according to DIN VDE 0185-305

- Base plate and covering hood from polystyrene, grey
- Contact strip made of nickel-plated brass
- Screws and crossbar made of electrogalvanised steel
- Capable of carrying lightning current 100 kA (10/350)

Connection options:

- 7 x single or multi-core conductors to 25 mm<sup>2</sup> or fine-core conductors to 16 mm<sup>2</sup>
- 1 x round conductor Rd 8-10
- 1 x flat strip to FL30 or round conductor Rd 8-10

**Type** Colour

Pack. Weight Item No.  
pcs kg/100 pcs.

1809	Grey	1	23,000	5015073
------	------	---	--------	---------

**CuZn** Brass

### Dimensions

