

Fine protection for 9-pole RS232 interface



Data cable protection devices, serial interfaces

- Various connection technologies available
- Low protection level


Application: PLC, alarm systems, controllers




Type	Highest Version	Pack. pcs	Weight kg/100 pcs.	Item No.
SD09-V24 9	18	1	6,000	5080 05 3

SD09-V24 9 | 18 | SUB-D-9; V24 RS232 | 1 | 6,000 | 5080 05 3

Dimensions

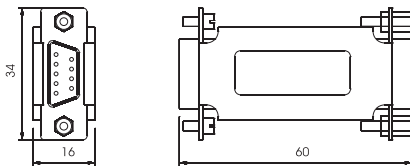

Connection options

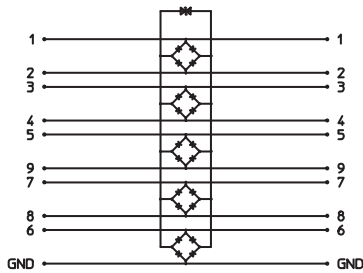

SD09-V24 9

Max. continuous operating voltage V	U_c	18
Category		Type 3 / C1
Lightning protection zone LPZ		2→3
Number of poles		9
Impulse durability wire-wire		0,34 kA (8/20 μ s)
Impulse durability wire-earth		0,34 kA (8/20 μ s)
Protection level wire-wire V		<50
Protection level wire-earth V		<50
Protection level, wire-earth at 1 kV/ μ s (C3) V	U_p	<25
Temperature range °C	θ	-40-80
Installation type		Connector/cable adapter
Connection system		D-Sub 9 pole
Protection rating		IP40
Shielding connection available		Yes
Shield connection		Direct
Testing standard		IEC 61643-21