


Protection set MCD + V20 3-pole + NPE

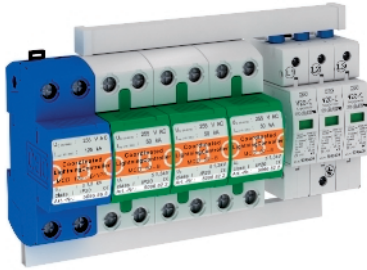


Protection set, lightning and surge arrester combination, type 1+2

- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole and up to 125 kA (10/350) N-PE
- Arrester, connectable, including connecting bridges, labelled connection terminals
- Encapsulated, non-extinguishing arrester for use in distributor housings


Application: Mobile telecommunications systems and industrial systems with special requirements.

Type	Highest continuous voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
PS4-B+C TT+TNS	255	3 + NPE	1	206,000	5089761

Dimensions

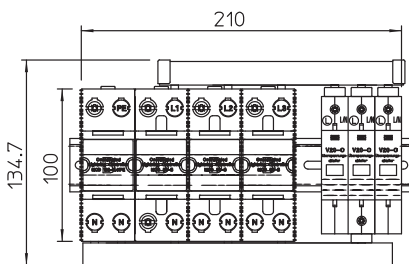

Connection options



PS4-B+C TT+TNS

Nominal voltage V	U_N	230
SPD to EN 61643-11		Type 1+2
SPD to IEC 61643-11		Class I+II
Lightning protection zone LPZ		0-2
Impulse discharge current (10/350) kA	I_{imp}	50
Total discharge current (10/350) kA	I_{total}	100
Nominal discharge current (8/20) kA	I_n	100
Arrester surge current (8/20) [total] kA	$I_{total 8/20}$	100
Maximum discharge current (8/20 μ s) kA	I_{max}	100
Voltage protection level kV	U_p	<1,3
Response time ns	t_A	<25
Follow current quenching capacity (eff) [N-PE] kA	I_n	25
Maximum back-up fuse A		125
Temperature range °C	ϑ	-40-85
Division unit TE (17.5 mm)		12
Protection rating		IP20
Connection cross-section rigid mm ²		10-50
Connection cross-section, multi-wire mm ²		10-35
Connection cross-section, flexible mm ²		10-25