

FineController for protective contact socket




Type 3 surge protection device to EN 61643-11, intended for use in protective contact sockets.


- Adapter
- Disconnection device and function display
- Child lock through increased finger touch protection

Type	Country version	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
FC-D	EN	Pure white	1	11,000	5092 80 0

Dimensions

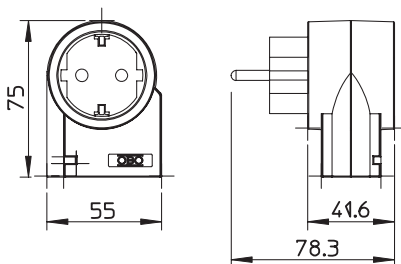

Connection options

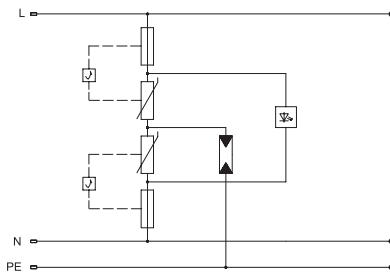

FC-D

Nominal voltage V	U_n	230
Max. continuous operating voltage V	U_c	275
SPD to EN 61643-11		Type 3
SPD to IEC 61643-11		class III
Lightning protection zone LPZ		2-3
Nominal discharge current (8/20) kA	I_n	3
Protection level (L-N) kV		< 1,2
Protection level (N-PE) kV		< 1,5
Maximum back-up fuse A		16
Response time ns	t_a	<25