


isCon® conductor

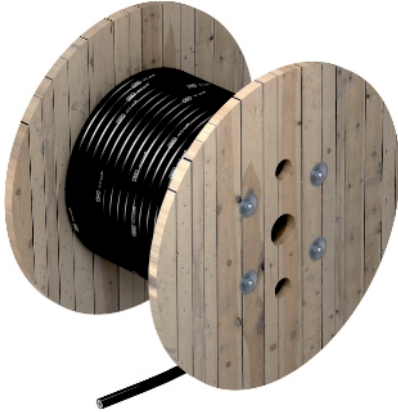

Please refer to the mounting instructions for information on routing the OBO isCon® cable.

- Floating discharge-free, high voltage-resistant, insulated arrestor
- For maintenance of the separation distance according to IEC 62305
- Equivalent separation distance $s \leq 0.75$ m in air
- Cable weight 69.4 kg/ 100m
- Halogen-free
- Can be used in potentially explosive areas Ex zone 1/2 and 21/22 when taking the current mounting instructions into account

Type	Colour	Cross-section mm ²	Nominal size mm	Equivalent separating distance s(e)/m	Pack. m	Weight kg/100 m	Item No.
isCon 750 SW	Black	35	23	0,75	25	69,400	5408002
isCon 750 SW	Black	35	23	0,75	100	69,400	5408004
isCon 750 SW	Black	35	23	0,75	250	69,400	5408006

Dimensions

