

Fine power protection / dado duct installation Modul 45




Surge protection / network fine protection, type 3, according to EN 61643-11 for installation in Rapid 45 ducts, device installation ducts and underfloor systems.

- Version-A with acoustic function display (switchable signal tone)
- Quick and easy mounting
- Low construction width of 22.5 mm


Application: The surge protection device secures downstream and nearby sockets.

Type	Signalling on device	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSS 45-A-RW	Audible	Acoustic function display	1	2,800	6117465

Dimensions

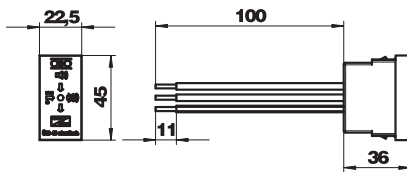

Connection options

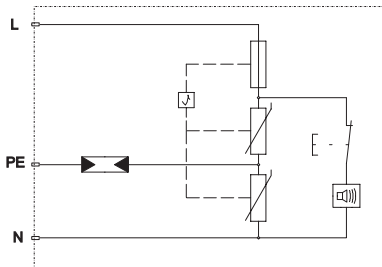

ÜSS 45-A-RW

Nominal voltage V	U_n	230
Max. continuous operating voltage V	U_c	255
SPD to EN 61643-11		Type 3
SPD to IEC 61643-11		Class III
Lightning protection zone LPZ		2→3
Nominal discharge current (8/20) kA	I_n	2.5
Protection level (L-N) kV		< 1.5
Protection level (N-PE) kV		< 1.5
Maximum back-up fuse A		16
Response time ns	t_a	25
Temperature range °C	θ	-25-45