


## Outdoor Verticasa Breakout Unit

**Prysmian Part Number: XJTSC00499**

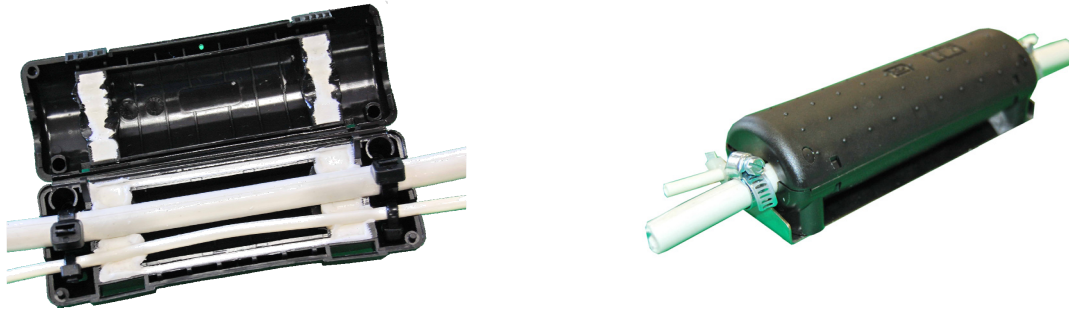

The Outdoor Verticasa Breakout unit is used to breakout and distribute the fibres from an in-line Verticasa cable into drop tubes, for routing to a customer premises. It is UV resistant and sealed to IP67, enabling it to be mounted in the outdoor environment. It has the capacity to accommodate an in-line Verticasa cable of up to 13mm in diameter. It enables a window to be cut in the cable to access the fibres, which can be spurred of into a drop tube of up to 7.2mm in diameter.

### Features and Benefits

- Can accommodate an in-line Verticasa cable of up to 13mm in diameter.
- Can accommodate drop tubes of up to 7.2mm in diameter.
- Easy to install mechanical system sealing system using Gel to provide a seal of IP67.
- UV resistant for external use.
- Non craft sensitive and reliable.
- Re-enterable and re-usable.

### Kit Contents

The Outdoor Verticasa Breakout Unit contains a Joint Closure, a Cable Fixing Bracket, Cable Ties and Wall Fixings.

### Technical Data

- Maximum Cable Diameter (mm): 13 (in-line), 7.2 (drop)
- Maximum no of Cable Entries: 1 (in-line), 2 (drop)
- IP Rating: 67
- Required space envelope (mm): (l) 185 x (w) 50 x (d) 50

### Logistics

- Packing Dimensions (mm): (l) 200 x (w) 60 x (d) 60
- Packed Weight (kg): 0.065
- Net weight (kg): 0.070

Please contact your local sales office listed on [www.prysmiangroup.com](http://www.prysmiangroup.com)

© Prysmian Group 2012, All Rights Reserved.  
The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.