

1.4. Patchpanels



- Cat5e compliant performance
- 90° termination blocks for easy termination
- Compatible with 110 & Krone Punch Tools
- Built in cable management
- Lasermark labels available on request

UC C300 PP TR U 48 1U BK

48port Cat5e UTP 90° Punchdown Panel
Rear Management in Black




Specification

| Item | Description |
|--|---|
| Panel | SPCC, 1.5mm thickness |
| RJ45 jack contact material and finish | Phosphor Bronze |
| Contact area | Min 3 mm 50 micro-inch Gold plated over Nickel colour |
| IDC terminal and finish | Phosphor Bronze with min, 50 micro-inch Tin plated |
| Wire size compatibility | 23-26 AWG solid wire |
| Dimensions | 482 x 44 x 143 mm |

Performance

| Item | Description |
|------------------------------|--|
| IDC cap colour code | supports both wiring schemes TIA 568A & 568B |
| Insertion force | 20N max |
| Retention strength | 7.7kg between jack and plug |
| Operating temperature | -10°C to 60°C |
| Durability | Jack 750 cycles |

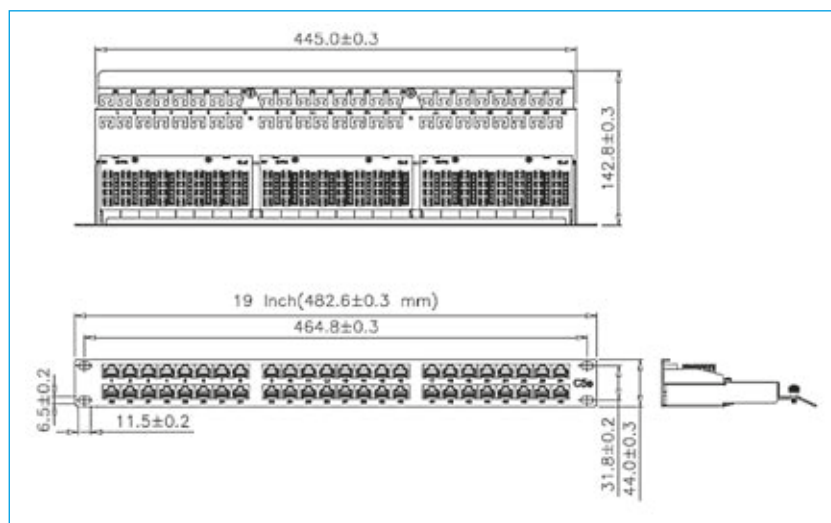

Technical data

| Product code | Product name | Description | Weight | Items per packaging unit |
|-------------------|--------------------------|---|--------|--------------------------|
| | | | g | |
| YPPBP00107 | UC C300 PP TR U 48 1U BK | 1U 48port Cat5e UTP 90° Punchdown Panel Rear Management in Black | 975 | 1 or 20 |